

ADVANCED PLACEMENT PHYSICS 1 TABLE OF INFORMATION

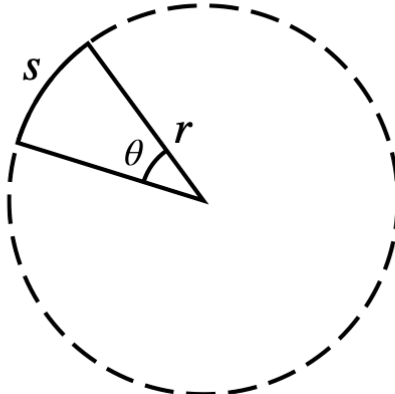

CONSTANTS AND CONVERSION FACTORS	
Universal gravitational constant, $G = 6.67 \times 10^{-11} \text{ m}^3/(\text{kg} \cdot \text{s}^2) = 6.67 \times 10^{-11} \text{ N} \cdot \text{m}^2/\text{kg}^2$ 1 atmosphere of pressure, $1 \text{ atm} = 1.0 \times 10^5 \text{ N/m}^2 = 1.0 \times 10^5 \text{ Pa}$	Magnitude of the acceleration due to gravity at Earth's surface, $g = 9.8 \text{ m/s}^2$ Magnitude of the gravitational field strength at Earth's surface, $g = 9.8 \text{ N/kg}$

PREFIXES		
Factor	Prefix	Symbol
10^{12}	tera	T
10^9	giga	G
10^6	mega	M
10^3	kilo	k
10^{-2}	centi	c
10^{-3}	milli	m
10^{-6}	micro	μ
10^{-9}	nano	n
10^{-12}	pico	p

UNIT SYMBOLS	hertz, Hz	newton, N
	joule, J	pascal, Pa
	kilogram, kg	second, s
	meter, m	watt, W

VALUES OF TRIGONOMETRIC FUNCTIONS FOR COMMON ANGLES							
θ	0°	30°	37°	45°	53°	60°	90°
$\sin \theta$	0	$1/2$	$3/5$	$\sqrt{2}/2$	$4/5$	$\sqrt{3}/2$	1
$\cos \theta$	1	$\sqrt{3}/2$	$4/5$	$\sqrt{2}/2$	$3/5$	$1/2$	0
$\tan \theta$	0	$\sqrt{3}/3$	$3/4$	1	$4/3$	$\sqrt{3}$	∞

The following conventions are used in this exam:	
• The frame of reference of any problem is assumed to be inertial unless otherwise stated. • Air resistance is assumed to be negligible unless otherwise stated. • Springs and strings are assumed to be ideal unless otherwise stated. • Fluids are assumed to be ideal, and pipes are assumed to be completely filled by fluid, unless otherwise stated.	

GEOMETRY AND TRIGONOMETRY			
Rectangle	Rectangular Solid		Right Triangle
$A = bh$	$V = \ell wh$		$a^2 + b^2 = c^2$
Triangle	Cylinder		$\sin \theta = \frac{a}{c}$
$A = \frac{1}{2}bh$	$V = \pi r^2 \ell$ $S = 2\pi r \ell + 2\pi r^2$		$\cos \theta = \frac{b}{c}$
Circle	Sphere		$\tan \theta = \frac{a}{b}$
$A = \pi r^2$ $C = 2\pi r$ $s = r\theta$	$V = \frac{4}{3}\pi r^3$ $S = 4\pi r^2$		

Equations		Units
linear kinematics	$v_x = v_{x0} + a_x t$ $x = x_0 + v_{x0} t + \frac{1}{2} a_x t^2$ $v_x^2 = v_{x0}^2 + 2a_x (x - x_0)$	m/s^2 m J N kg·m/s = N·s
center of mass	$\vec{x}_{cm} = \frac{\sum m_i \vec{x}_i}{\sum m_i}$	N/m J kg
Newton's 2nd law	$\vec{a}_{sys} = \frac{\sum \vec{F}}{m_{sys}} = \frac{\vec{F}_{net}}{m_{sys}}$	kg·m/s W = J/s = N·m/s
gravitational force	$ \vec{F}_g = G \frac{m_1 m_2}{r^2}$	m s
friction force	$ \vec{F}_f \leq \mu \vec{F}_N $	J m/s
spring force (Hooke's Law)	$\vec{F}_s = -k \Delta \vec{x}$	J = N·m
centripetal acceleration	$a_c = \frac{v^2}{r}$	m rad or deg
translational kinetic energy	$K = \frac{1}{2} m v^2$	(no unit)
work	$W = F_{\parallel} d = F d \cos \theta$	
work-energy theorem	$\Delta K = \sum W_i = \sum F_{\parallel,i} d_i$	
spring potential energy	$U_s = \frac{1}{2} k (\Delta x)^2$	
gravitational potential energy	$U_G = -\frac{G m_1 m_2}{r}$ $\Delta U_g = mg \Delta y$	
power	$P_{avg} = \frac{W}{\Delta t} = \frac{\Delta E}{\Delta t}$ $P_{inst} = F_{\parallel} v = F v \cos \theta$	
linear momentum	$\vec{p} = m \vec{v}$	
impulse	$\vec{F}_{net} = \frac{\Delta \vec{p}}{\Delta t} = m \frac{\Delta \vec{v}}{\Delta t} = m \vec{a}$ $\vec{J} = \vec{F}_{avg} \Delta t = \Delta \vec{p}$	
velocity of center of mass	$\vec{v}_{cm} = \frac{\sum \vec{p}_i}{\sum m_i} = \frac{\sum m_i \vec{v}_i}{\sum m_i}$	

Equations			Units
rotational kinematics	$\omega = \omega_0 + \alpha t$ $\theta = \theta_0 + \omega_0 t + \frac{1}{2} \alpha t^2$ $\omega^2 = \omega_0^2 + 2\alpha(\theta - \theta_0)$	$a = \text{acceleration}$ $A = \text{amplitude or area}$ $d = \text{distance}$ $f = \text{frequency}$ $F = \text{force}$ $h = \text{height}$ $I = \text{rotational inertia}$ $k = \text{spring constant}$ $K = \text{kinetic energy}$ $\ell = \text{length}$ $L = \text{angular momentum}$ $m = \text{mass}$ $M = \text{mass}$ $P = \text{pressure}$ $r = \text{radius or distance}$ $t = \text{time}$ $T = \text{period}$ $v = \text{velocity or speed}$ $V = \text{volume}$ $W = \text{work}$ $x = \text{position}$ $y = \text{vertical position}$ $\alpha = \text{angular acceleration}$ $\theta = \text{angle or angular position}$ $\rho = \text{density}$ $\tau = \text{torque}$ $\omega = \text{angular speed}$	m/s^2 m or m^2 m $\text{Hz} = 1/\text{s}$ N m $\text{kg}\cdot\text{m}^2$ N/m J m $\text{kg}\cdot\text{m}^2/\text{s}$ kg kg $\text{Pa} = \text{N/m}^2$ m s s m/s m^3 $\text{J} = \text{N}\cdot\text{m}$ m m rad/s^2 rad or deg kg/m^3 $\text{N}\cdot\text{m}$ rad/s
linear / rotational kinematics	$v = r\omega$ $a_T = r\alpha$		
torque	$\tau = r_{\perp} F = rF \sin \theta$		
rotational inertia	$I = \sum m_i r_i^2$		
parallel axis theorem	$I' = I_{\text{cm}} + Md^2$		
Newton's 2nd law (rotation)	$\alpha_{\text{sys}} = \frac{\Sigma \tau}{I_{\text{sys}}} = \frac{\tau_{\text{net}}}{I_{\text{sys}}}$		
rotational kinetic energy	$K = \frac{1}{2} I \omega^2$		
work (rotation)	$W = \tau \Delta \theta$		
angular momentum	$L = I \omega$ $L = rmv \sin \theta$		
angular impulse	$\Delta L = \tau \Delta t$		
center of mass (rolling)	$\Delta x_{\text{cm}} = r \Delta \theta$		
period	$T = \frac{1}{f}$		
mass-spring period	$T_s = 2\pi \sqrt{\frac{m}{k}}$		
pendulum period	$T_p = 2\pi \sqrt{\frac{\ell}{g}}$		
simple harmonic motion	$x = A \cos(2\pi ft)$ $x = A \sin(2\pi ft)$		
density	$\rho = \frac{m}{V}$		
pressure	$P = \frac{F_{\perp}}{A}$ $P = P_0 + \rho gh$ $P_{\text{gauge}} = \rho gh$		
buoyant force	$F_b = \rho V g$		
conservation of flow rate	$A_1 v_1 = A_2 v_2$		
Bernoulli's equation	$P_1 + \rho g y_1 + \frac{1}{2} \rho v_1^2 = P_2 + \rho g y_2 + \frac{1}{2} \rho v_2^2$		